

# Data Sheet for Precision Potentiometer

Multiturn Wirewound Potentiometer

Series AL20



The robust AL20 potentiometers in 20 mm housing are suitable for applications where a precise and economical multiturn potentiometer is important.

- Economical and precise multiturn sensor with numerous options
- Completely encapsulated housing with 2 x sleeve bearings
- Without pilot ring - with  $\varnothing 6,00 \times 25$  mm shaft
- With many options

The sintered bearing in the back cover gives the shaft improved stability. The completely encapsulated housing increases the robustness in addition. The potentiometer is available in 5 or 10 turn version.

Electrical Data	5-turn	10-turn
Effective electrical angle of rotation 1.)	1800° $\pm 5^\circ$	3600° $\pm 5^\circ$
Total resistance 1.)	0,1..100 kOhm	0,2..150 kOhm
Resistance tolerance	$\pm 5\%$ ( $\pm 1\%$ )	
Independent linearity (best straight line) 1.)	$\pm 0,25\%$	$\pm 0,25\%$ ( $\pm 0,1\%$ @ $R \geq 5k$ )
Theoretical resolution 1.)	Depends on resistance value (see table below)	
Backlash (Hysteresis) 1.)	$\leq 2^\circ$	
Rotational noise (ENR) 1.) (Method C)	100 Ohm	
Max. / recommended wiper current 1.)	35 mA / 2 $\mu$ A	
Power rating @ 70°C (0W @ 105°C)	1 W	2 W
Insulation Voltage 1.)	1000 VAC, 1min	
Insulation Resistance 1.)	1000 MOhm @ 500 VDC	

Mechanical Data, Environmental Conditions, Miscellaneous	5-turn	10-turn
Mechanical angle of rotation	1800° $+10^\circ$	3600° $+10^\circ$
Lifetime (90% el. eff. angle half sine) 2.)	1 Mio. rotations	2 Mio. rotations
Max. operational speed	40 rev. / min.	
Bearing	2 x sleeve bearing	
Operational torque @ ambient temperature 1.) 2.)	5 Nmm	
End stop torque 1.) 2.)	90 Ncm	
Operating temperature range	-55..+105°C	
Storage temperature range	-55..+105°C	
Protection grade (IEC 60529)	IP40	
Protection option D shaft sealing (IEC 60529)	IP65 optional	
Vibration (IEC 68-2-6, Test Fc)	15g 10..2000Hz x 12h	
Shock (IEC 68-2-27, Test Ea)	49g @ 11 ms x 18	
Housing diameter	20 mm	
Housing depth	18 mm	25,5 mm
Shaft diameter	6,00 mm	
Shaft type	Solid shaft	

# Data Sheet for Precision Potentiometer

Multiturn Wirewound Potentiometer

Series AL20

Mechanical Data, Environmental Conditions, Miscellaneous	5-turn	10-turn
Max. radial load	≤1 N	
Max. axial load	≤1 N	
Connection type	Gold plated soldering lugs	
Connection position	Radial	
Sensor mounting	Bushing	
Mass	app. 20 g	app. 25 g
Fastening parts included in delivery AC / ACP	Nut, toothed washer / nut, toothed washer, support plate	
Fastening torque mounting nut	< 150 Ncm	
Material shaft	Stainless steel	
Material housing	Reinforced fibreglass PA66	

1.) According IEC 60393

2.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

Please note: Max. permissible supply voltage <75 VDC respectively <50 VAC in addition the max. power rating must be observed

Number of wire turns / resolution														
Resistance value Ohm	10	20	50	100	200	500	1k	2k	5k	10k	20k	50k	100k	150k
Number of wire turns (AL20 05)	980	1220	980	1100	1500	2000	2500	2400	3200	3900	4800	5500	6500	-
Number of wire turns (AL20 10)	-	1850	2550	1800	2200	3200	4000	5000	5000	6400	7800	10000	11000	N/A

Resolution in degree E.g. R5k 5-turn =  $1800^\circ / 3200 = 0,563^\circ$  per winding resistive wire




# Data Sheet for Precision Potentiometer



Multiturn Wirewound Potentiometer


Series AL20

## Drawing

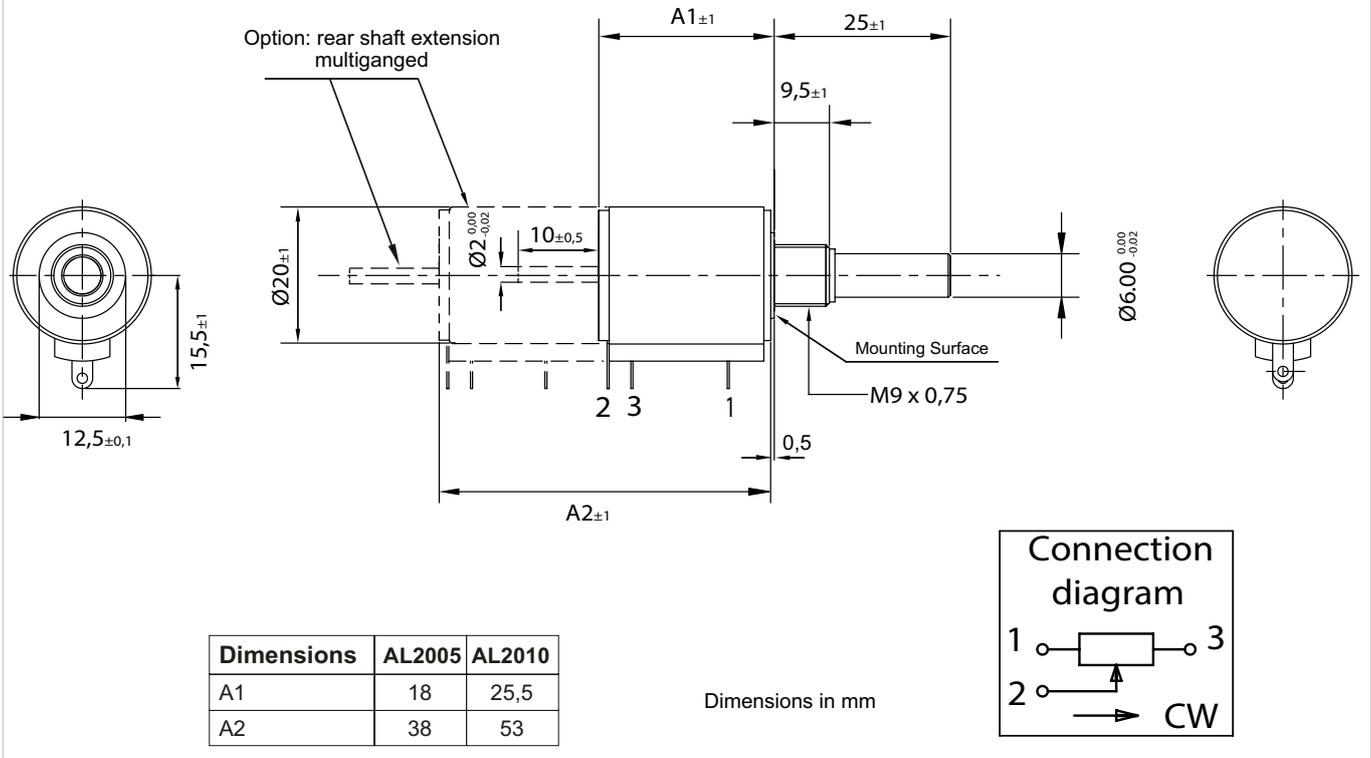


### On Request: Special machining on shaft


Slot

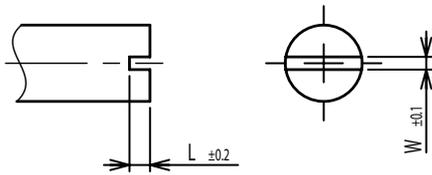


Groove

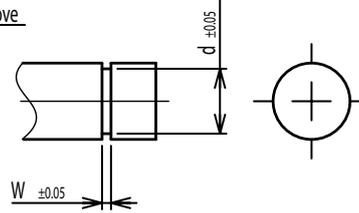


Flat

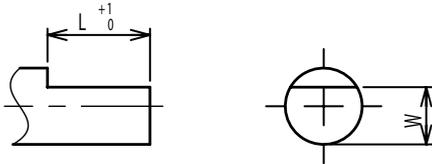


Round top

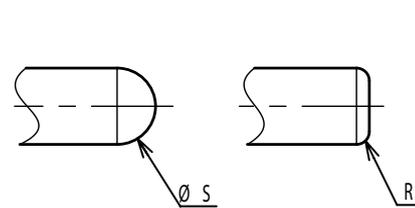


Double side flat

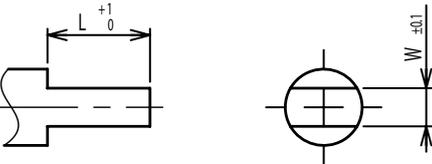


Counterbore hole

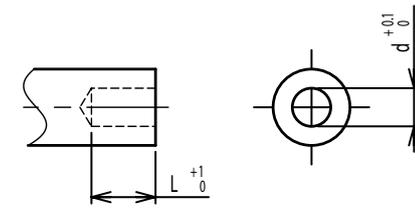


Step

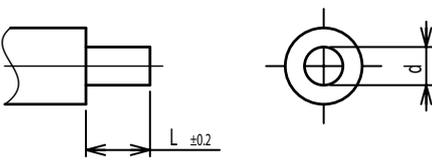


Counterbore screw hole

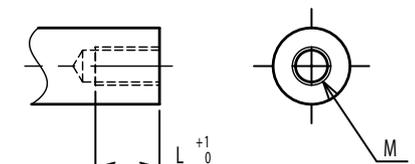


Screw Thread

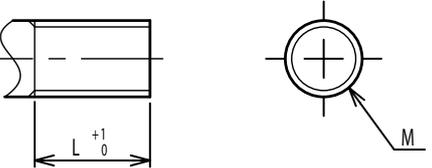

Pin hole

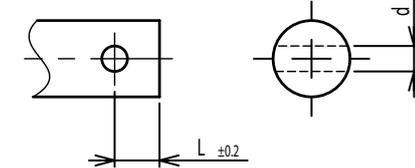

Knurled(Parallel)

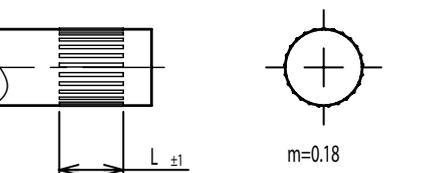

Screw thread inside hole

