




MARK	CONTENT OF AMENDMENT	DATE	DRAW




Number of rings	6	12	18	24
Power(L*)	58.8	82.8	106.8	130.8

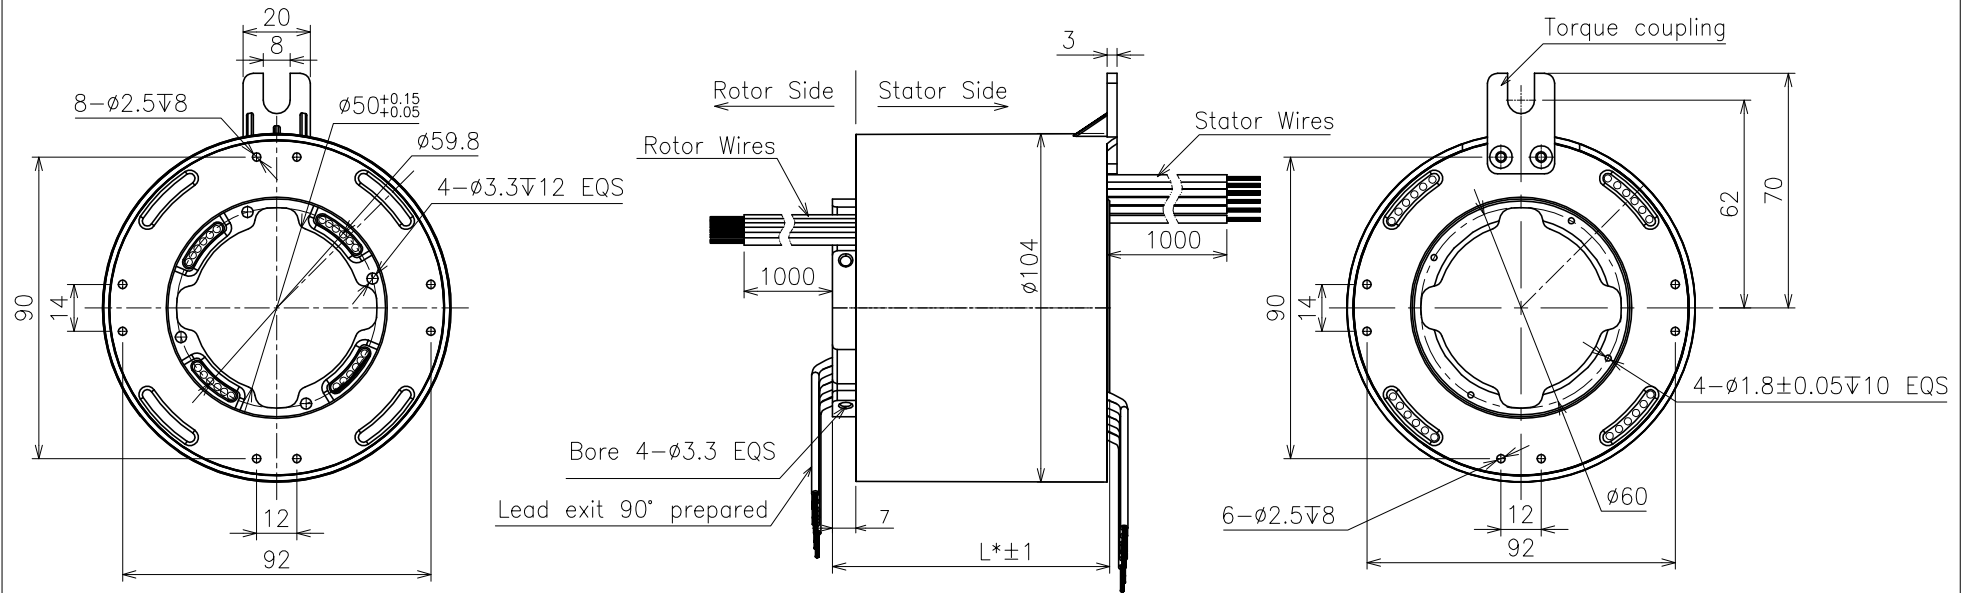

TDS Precision Products
TDS Precision Products GmbH
Industriestrasse 1a
CH-8157 Dielsdorf
T + 41 44 885 30 80
info@tds-pp.com
www.tds-pp.com

MODEL	SPT050-104						
Customer code		TITLE	Outline Drawing				
UNIT	mm	TOL UNLESS SPECIFIED	DESIGN	CYM	DATE	2019.10.23	
SCALE	1:1	LINEAR 0--18 ±0.1 >18--80 ±0.15 >80--250 ±0.2	CHECKED	LML	DATE	2019.10.23	
PROJ.		ANGLE x' ±0.5°	REV.	AO	PAGE	1/2	

MARK	CONTENT OF AMENDMENT	DATE	DRAW

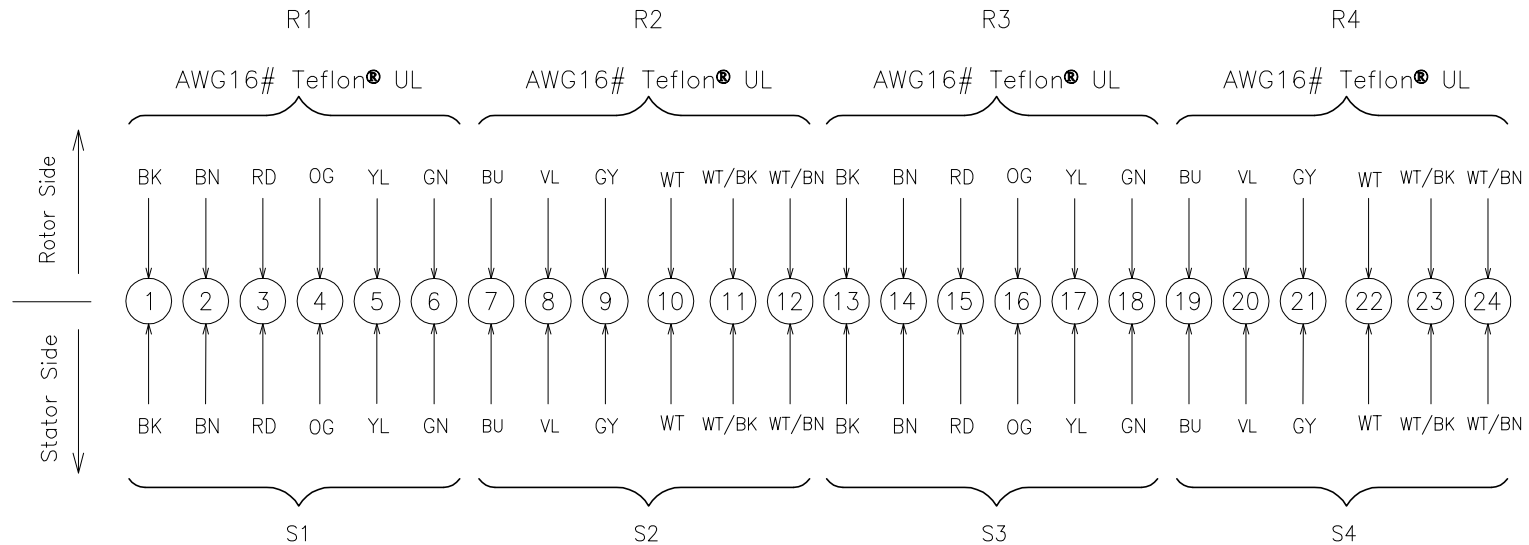

Number of rings	6	12	18	24
Circuit	R1 S1	R1~R2 S1~S2	R1~R3 S1~S3	R1~R4 S1~S4

Remarks;
The corresponding loop covers the corresponding number tube.

Electronic & Electric		Mechanical		
Circuits	Total	6/12/18/24 CKT	Working Speed	0~400rpm
	Detail	10A	Inner Diameter	ø50mm
Rating Voltage		500V AC/DC	Contact Material	Fiber Brush
Dielectric Strength		1500VAC@60Hz	Housing Material	Fibre-reinforced plastics
Insulation Resistance		≥1000MΩ@500VDC	Lead Wire Length	Stator:1m Rotor:1m
Environment		Remarks		
Working Temperature		-40°C~+80°C	Application	/
Working Humidity		≤60%RH	Other	/
IP		IP54		



TDS Precision Products GmbH
Industriestrasse 1a
CH-8157 Dielsdorf

T + 41 44 885 30 80
info@tds-pp.com
www.tds-pp.com

MODEL	SPT050-104						
Customer code				TITLE	Wiring Diagram		
UNIT	mm	TOL UNLESS SPECIFIED LINEAR 0--18 ±0.1 >18--80 ±0.15 >80--250 ±0.2 ANGLE x' ±0.5°	DESIGN	CYM	DATE	2019.10.23	
SCALE	1:1		CHECKED	LML	DATE	2019.10.23	
PROJ.		REV.	AO	PAGE	2/2		