


◎ SR - XX - B / C

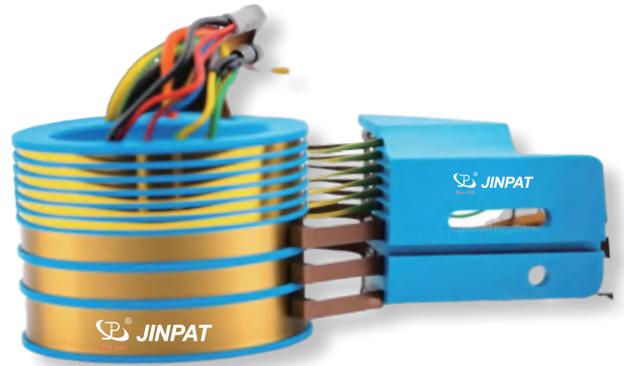

Features

- ◎ Inner diameter: 50 mm (60 / 70 mm optional)
- ◎ Custom ring and cable configurations
- ◎ Optional brush block designs
- ◎ Can withstand industrial environments
- ◎ Multiple mounting options for flexible integration

Typical Applications

- Medical Engineering

Data

- Number of rings: Max. 9
- Current per ring: 3 Circuits* 10A and 6Circuits* 2A
- Voltage: 48VDC
- Dielectric strength: $\geq 500\text{VAC}@50\text{Hz}$
- Insulation resistance: $\geq 100\text{M}\Omega@500\text{VDC}$
- Rotation speed: 0~20rpm
- Protection class: IP00
- Operating temperature: $-20\text{ }^{\circ}\text{C}\sim 80\text{ }^{\circ}\text{C}$
- Electrical connection: customization (flying leads, cables or connectors)
- Housing material: Engineering plastics

Design Example

