


Data Sheet for Precision Potentiometer

Multiturn Wirewound Potentiometer

Series SMT

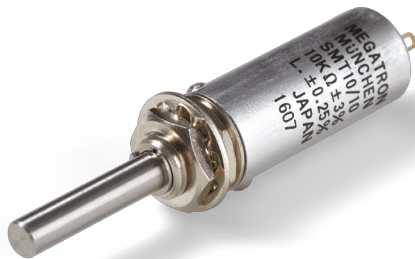

The SMT potentiometers in 10,5 mm housing are suitable for applications where a miniaturized and precise multiturn potentiometer is important.

- Smallest 10-turn potentiometer in the world
- Only Ø10,5 mm
- 5 or 10 turn version
- Robust metal housing
- With many options

The precision potentiometers of the series SMT are the smallest multiturn wirewound potentiometers in the world. The potentiometer is as a 5 or 10 turn version and optionally with rear shaft available.

Electrical Data	3-turn	5-turn
Effective electrical angle of rotation 1.)	1800° ±5°	3600° ±5°
Total resistance 1.)	100 Ohm..50 kOhm	100 Ohm..50 kOhm
Resistance tolerance	±3% (±1%)	
Independent linearity (best straight line) 1.)	±0,3% (±0,2%) [±0,25% R< 5k]	±0,25% (±0,1%) [±0,15% R< 5k]
Theoretical resolution 1.)	Depends on resistance value (see table below)	
Backlash (Hysteresis) 1.)	≤ 2°	
Rotational noise (ENR) 1.) (Method C)	100 Ohm	
Max. / recommended wiper current 1.)	35 mA / 2 µA	
Power rating @ 70°C (0W @ 105°C)	0,5 W	1 W
Insulation Voltage 1.)	500 VAC, 1min	
Insulation Resistance 1.)	100 MOhm @ 500 VDC	

Mechanical Data, Environmental Conditions, Miscellaneous	3-turn	5-turn
Mechanical angle of rotation	1800° +30°	3600° +30°
Lifetime (90% el. eff. angle half sine) 2.)	1 Mio. rotations	2 Mio. rotations
Max. operational speed	40 rev. / min.	
Bearing	Sleeve bearing	
Operational torque @ ambient temperature 1.) 2.)	3 Nmm	
End stop torque 1.) 2.)	10 Ncm	
Operating temperature range	-55..+105°C	
Storage temperature range	-55..+105°C	
Protection grade (IEC 60529)	IP40	
Protection option D shaft sealing (IEC 60529)	IP65 optional	
Vibration (IEC 68-2-6, Test Fc)	15g 10..2000Hz x 12h	
Shock (IEC 68-2-27, Test Ea)	49g bei 11 ms x 18	
Housing diameter	10,5 mm	
Housing depth	19,2 mm	25,5 mm
Shaft diameter	4,00 mm	
Shaft type	Solid shaft	

Data Sheet for Precision Potentiometer

Multiturn Wirewound Potentiometer

Series SMT

Mechanical Data, Environmental Conditions, Miscellaneous	3-turn	5-turn
Max. radial load	≤1 N	
Max. axial load	≤1 N	
Connection type	Soldering lugs	
Connection position	Axial	
Sensor mounting	Bushing	
Mass	app. 20 g	
Fastening parts included in delivery	Nut, toothed washer	
Fastening torque mounting nut	< 100 Ncm	
Material shaft	Stainless steel	
Material housing	Aluminium	

1.) According IEC 60393

2.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

Please note: Max. permissible supply voltage <75 VDC respectively <50 VAC in addition the max. power rating must be observed

Number of wire turns / resolution										
Resistance value Ohm	100	200	500	1k	2k	5k	10k	20k	50k	100k
Number of wire turns (SMT10-5-turn)	750	620	830	1050	1330	1820	2300	2940	3900	-
Number of wire turns (SMT10-10-turn)	1200	1500	1350	1670	2100	2860	3640	4550	6250	7850

Resolution in degree E.g. R5k 5-turn = $1800^\circ / 1820 = 0,989^\circ$ per winding resistive wire

Data Sheet for Precision Potentiometer

Multiturn Wirewound Potentiometer

Series SMT

Order code

Description		Selection: standard=black/bold, possible options=grey/cursive							
Series	SMT								
Revolutions with stop:									
5-turn		10/5							
10-turn		10/10							
Resistance value:									
<i>Option 100 Ohm</i>			<i>R100</i>						
<i>Option 200 Ohm</i>			<i>R200</i>						
<i>Option 500 Ohm</i>			<i>R500</i>						
<i>Option 1 kOhm</i>			<i>R1k</i>						
<i>Option 2 kOhm</i>			<i>R2k</i>						
5 kOhm			R5k						
10 kOhm			R10k						
<i>Option 20 kOhm</i>			<i>R20K</i>						
<i>Option 50 kOhm</i>			<i>R50K</i>						
<i>Option 100 kOhm (only 10 Turn)</i>			<i>R100K</i>						
Option rear shaft:									
<i>Standard Ø0,8 x 10 mm</i>				<i>RA</i>					
<i>Shaft length in mm</i>				<i>RAxx,xx</i>					
<i>Shaft diameter in mm (≤6,35 mm)</i>				<i>RADMx,xx</i>					
Resistance tolerance:									
±3%					W3%				
<i>Option ±1%</i>					<i>W1%</i>				
Independent linearity:									
±0,3% (5-turn)						L0,3%			
<i>Option ±0,25% (5-turn R < 5kOhm)</i>						<i>L0,25%</i>			
<i>Option ±0,2% (5-turn)</i>						<i>L0,2%</i>			
±0,25% (10-turn)						L0,25%			
<i>Option ±0,15% (10-turn R < 5kOhm)</i>						<i>L0,15%</i>			
<i>Option ±0,1% (10-turn)</i>						<i>L0,1%</i>			
Front shaft:									
Standard Ø4 x 25 mm						-			
<i>Option shaft length in mm</i>						<i>Ax,xx</i>			
<i>Option shaft diameter in mm (≤4 mm)</i>						<i>DMx,xx</i>			
<i>Option screwdriver slot:</i>								<i>B</i>	
Shaft sealing:									
Standard is without sealing									-
<i>Option D with shaft sealing</i>									<i>D</i>

For higher quantities or on-going demand, additional options are available as described below on request

For Example: Sealed housing case, special electrical and mechanical angles of rotation, and special resistance and linearity tolerances. Furthermore we can mount gear wheels or attach cable assemblies with or without connectors and much more.



Data Sheet for Precision Potentiometer



Multiturn Wirewound Potentiometer

Series SMT

Drawing

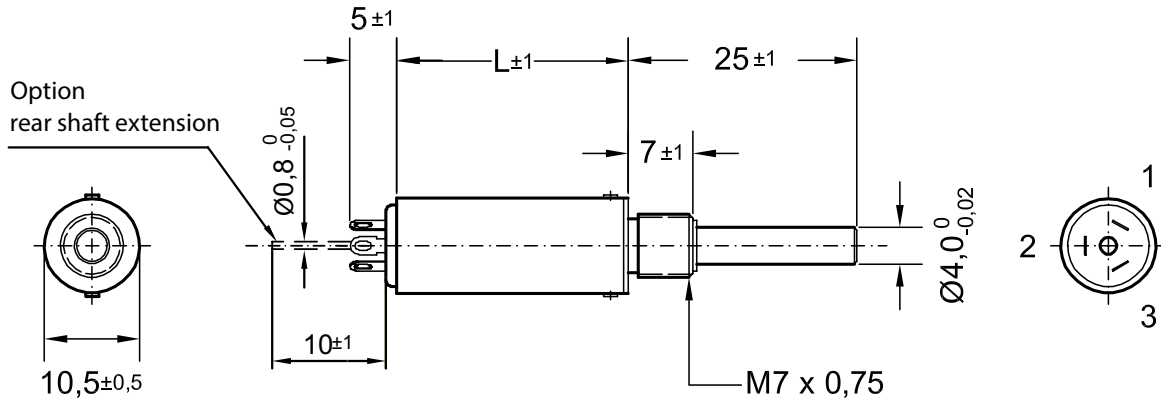

	L
5-turn	19,2
10-turn	25,5

Dimension in mm



TDS Precision Products GmbH
 Industriestrasse 1a
 CH-8157 Dielsdorf

T + 41 44 885 30 80
 info@tds-pp.com
 www.tds-pp.com