

NHG2060 Series

Slip rings of the NHG2060 series are specially fit for high temperature 100°C~250°C working environment such as hot roller, heating device. Grand applies noble precious metal reduced noises and interference between circuits, low friction torque assures long life-span.

NHG2060 series with through hole 20mm, OD60mm, suitable for rotating application which requires a through hole ≤ 20 mm, Standard model supports 1-24 power rings(0-10A/ring) or 1-48 signal rings(0~5A/ring)

Features

- ◆ Multi-point brush contact material ensure long life
- ◆ Integrated structure design for easy installation
- ◆ Standard model supports 1-96rings power or signal(0~20A/ring)
- ◆ IP 51 (IP54-IP68 can be customized)
- ◆ Both the data bus agreement compatible
- ◆ Free maintenance

Typical application

- ◆ Automatic machines
- ◆ Robotics, rotary sensors, urgent illumination equipment
- ◆ Roller
- ◆ Packaging
- ◆ Heating device
- ◆ Medical,Pharmaceutical equipment
- ◆ Converting machines
- ◆ Capping machines
- ◆ Labeling machines
- ◆ Filling machine
- ◆ Machine tools

Options

- ◆ Optional for underwater IP65, IP68Operation speed, current &voltage
- ◆ No. of rings
- ◆ Connector
- ◆ Housing material
- ◆ Position of wire outlet, wire length
- ◆ Protection level (dust and water)
- ◆ Flange mounting is optional
- ◆ Operating temperature
- ◆ Support mixed high speed data transmission(including Ethernet, USB, Profibus, Ethercat, CANOPEN, CANBUS, RS232, RS485, etc.)
- ◆ Fluidic rotary joints, FORJ and electric slip ring can be mixed.

Specifications

Electrical Data			Mechanical Data	
	Power	Signal	Max. Speed	0-250 rpm
Rated Current	5~10A/ring	2~5A/ring	Working Temperature	-20°C~+250°C
Rated Voltage	0~380VAC/VDC	0~240VAC/VDC	Working Humidity	0-85% RH
Insulation Resistance	≥500MΩ/500VDC	≥500MΩ/500VDC	Structure Material	Engineering plastic or metal
Dielectric Strength	500VAC@50Hz,60s	500VAC@50Hz,60s	Contact material	Precious metal
Wire Size	Sliver plated Teflon AWG16(10A)	Sliver plated Teflon AWG26(2A),AWG22(5A)	Operating Torque	0.1N·m for 6 rings, 0.03 N·m increased for every 6 rings added
Wire Length	Standard 500mm(adjustable)			
Dynamic Resistance	<0.01Ω		Protection level	IP51


Product Code

For standard versions	<u>NHG XXX XXX – XP/XS –XXX</u>
	1 2 3 4 5 6
1	High temperature slip ring
2	Inner dimension of housing ; Eg, XXX= 100, the ID is 100mm
3	Outer dimension of housing; Eg, XXX= 203, the OD is 203mm
4	Number of power rings; Eg, XP= 3P, the number of power rings is 3, P=10A, P1=15A, P2=20A
5	Number of signal circuits; Eg, XS= 2S, the number of signal rings is 2
6	Customer special options

Lead Wires Color Code

Ring#	1	2	3	4	5	6	7	8	9	10	11	12
Color	RED	YEL	BLK	BLU	GRN	WHT	PUP	GRY	BRN	ORN	DBLU	KHK

Drawing for Outline Dimension

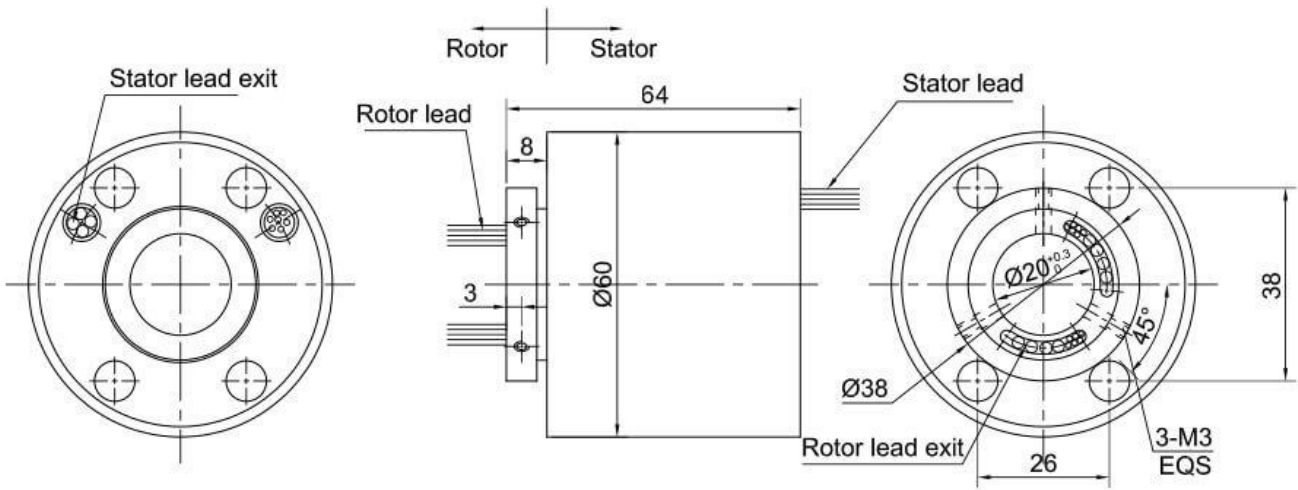

Model List

Model	Power Ring(10A)	Signal Ring(5A)	Length (mm)
NHG2060-2P/6S	2	6	64
NHG2060-2P/8S	2	8	64
NHG2060-3P/7S	3	7	64
NHG2060-4P/6S	4	6	64



TDS Precision Products GmbH
 Industriestrasse 1a
 CH-8157 Dielsdorf

T + 41 44 885 30 80
 info@tds-pp.com
 www.tds-pp.com